

# IEC Tru-Metric™ Motors


## GENERAL PURPOSE MOTORS

### TEFC - Three-Phase

This line is designed and built according to European IEC34 and IEC79 standards.

#### Standard Features:

- 60 Hz (1.15 service factor) and 50 Hz (1.0 service factor)
- Class F insulation (Impregnation Resin and Magnet wire are class H)
- F2 mounted as standard (F1 convertible)
- Stainless Steel Nameplate - Laser etched with high contrast background
- Regreasable ball bearings (Frames 160 and up)
- Gasketed conduit box
- Class I, Div. 2, Groups A, B, C & D – T3, Class II, Div 2, Groups F & G – T3C (Cast Iron Frames only)
- Suitable for WYE/Delta Start (W and Y voltage code motors)

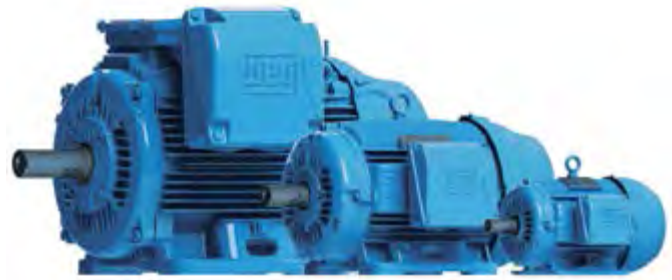

W22 Cast Iron



Aluminum

#### Features that make a difference:

- 1.25 service factor for 60 Hz operation (IE3)
- 1.15 service factor for 60 Hz operation (IE2)
- Optimized ventilation system for cooler operation and reduced noise levels
- Solid base for reduced vibration levels (Cast Iron Frames)
- Frames 225 and up can easily be F1 (B3L) converted by simply rotating the terminal box adapter or F3 by removing it
- Aluminum frames have removable feet for easy F1, F2 and F3 (B3L, B3R, B3T) conversion
- Terminal blocks

#### ADDITIONAL TECHNICAL DATA

ELECTRICAL DATA: B-34 to B-48

MECHANICAL DATA: C-20 to C-26

**Inverter Rated (IE3):**  
**1000:1 for variable torque**  
**12:1 for constant torque**

*\* IE2 is 10:1 VT and 4:1 CT*





SAFE AREA

SAFE AREA

TEFC – Foot Mount *continued*

TEFC – Foot Mount *continued*

Table with 14 columns: HP, kW, RPM, NEMA Frame, Catalog Number, List Price, Mult. Symbol, Approx. Shipping Weight (lbs), Service Factor, FL Amps @ High, FL Eff (%), "C" Dimension (in), Voltage (V), Notes. Rows include motor specifications for 5.5, 7.5, 10, and 15 HP.

Continued on next page

Refer to electrical and mechanical data sections for additional technical information. Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit <http://catalog.wegelectric.com>

Data subject to change without notice.

Table with 14 columns: HP, kW, RPM, NEMA Frame, Catalog Number, List Price, Mult. Symbol, Approx. Shipping Weight (lbs), Service Factor, FL Amps @ High, FL Eff (%), "C" Dimension (in), Voltage (V), Notes. Rows include motor specifications for 20, 25, 30, 40, and 50 HP.

Continued on next page

Refer to electrical and mechanical data sections for additional technical information. Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit <http://catalog.wegelectric.com>

Data subject to change without notice.

SAFE AREA

SAFE AREA

TEFC – Foot Mount *continued*

TEFC – Foot Mount *continued*

Table with 14 columns: HP, kW, RPM, NEMA Frame, Catalog Number, List Price, Mult. Symbol, Approx. Shipping Weight (lbs), Service Factor, FL Amps @ High, FL Eff (%), "C" Dimension (in), Voltage (V), Notes. Rows include motor specifications for 60, 75, 100, 125, and 150 HP ratings.

Table with 14 columns: HP, kW, RPM, NEMA Frame, Catalog Number, List Price, Mult. Symbol, Approx. Shipping Weight (lbs), Service Factor, FL Amps @ High, FL Eff (%), "C" Dimension (in), Voltage (V), Notes. Rows include motor specifications for 175, 200, 250, 300, 350, 400, and 450 HP ratings.

Continued on next page

Refer to electrical and mechanical data sections for additional technical information. Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit <http://catalog.wegelectric.com>

Data subject to change without notice.

Refer to electrical and mechanical data sections for additional technical information. Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit <http://catalog.wegelectric.com>

Data subject to change without notice.

Can't find what you are looking for? Call 1-800-ASK-4WEG (275-4934)



# IEC Tru-Metric™ Motors

ATEX MOTORS – Non-Sparking

## TEFC - Ex nA

Ex nA motors do not require certification by a third party entity (a manufacturer's compliance declaration is sufficient). Nevertheless the Ex nA motors manufactured by WEG are certificated by Ex NB BASEEFA.



### Standard Features:

- 50 Hz and 60 Hz rated (1.00 service factor)
- Class F insulation (Impregnation Resin and magnet Wire are class H)
- F3 mounted as standard
- Stainless Steel Nameplate - Laser etched with high contrast background
- Regreasable ball bearings (Frames 160 and up)
- Gasketed conduit box
- Zone 2, Groups IIA, IIB and IIC
- Suitable for WYE/Delta Start
- Design N
- Conductive plastic fan (frames 63 up to 315)
- Aluminum fan (frame 355)

HP	KW	RPM	NEMA Frame	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL. Eff (%)	"C" Dimension (in)	Voltage (V)	Notes
0.25	0.18	3000	63	E0.1836EP3WAX63F3-W2	364	XN	2073	1.00	0.51	63.6	8.504	220-240/380-415//440-460	8;11;27
		1500	63	E0.1818EP3WAX63F3-W2	365	XN	2073	1.00	0.55	61.2	8.504	220-240/380-415//440-460	8;11;27
		1000	71	E0.1812EP3WAX71F3-W2	476	XN	2073	1.00	0.74	58.6	9.764	220-240/380-415//440-460	8;11;27
0.33	0.25	3000	63	E0.2536EP3WAX63F3-W2	373	XN	2073	1.00	0.75	64.5	8.504	220-240/380-415//440-460	8;11;27
		1500	71	E0.2518EP3WAX71F3-W2	415	XN	2073	1.00	0.76	66.5	9.764	220-240/380-415//440-460	8;11;27
		1000	71	E0.2512EP3WAX71F3-W2	483	XN	2073	1.00	1.08	59.7	9.764	220-240/380-415//440-460	8;11;27
0.5	0.37	3000	71	E0.3736EP3WAX71F3-W2	408	XN	2073	1.00	0.88	71.2	9.764	220-240/380-415//440-460	8;11;27
		1500	71	E0.3718EP3WAX71F3-W2	427	XN	2073	1.00	1.06	67.9	9.764	220-240/380-415//440-460	8;11;27
		1000	80	E0.3712EP3WAX80F3-W2	507	XN	2073	1.00	1.05	67.1	10.866	220-240/380-415//440-460	8;11;27
0.75	0.55	3000	71	E0.5536EP3WAX71F3-W2	415	XN	2073	1.00	1.23	72.5	9.764	220-240/380-415//440-460	8;11;27
		1500	80	E0.5518EP3WAX80F3-W2	488	XN	2073	1.00	1.29	74.1	10.866	220-240/380-415//440-460	8;11;27
		1000	80	E0.5512EP3WAX80F3-W2	523	XN	2073	1.00	1.50	70.9	10.866	220-240/380-415//440-460	8;11;27
		1	0.75	3000	80	.7536ET3WAX80F3-W22	659	XN	2073	1.00	1.61	82.1	10.866
3000	80			E0.7536EP3WAX80F3-W2	499	XN	2073	1.00	1.56	79.5	10.866	220-240/380-415//440-460	8;11;27
1500	80			.7518ET3WAX80F3-W22	670	XN	2073	1.00	1.60	82.8	10.866	220-240/380-415//440-460	8;11
1500	80			E0.7518EP3WAX80F3-W2	507	XN	2073	1.00	1.61	80.1	10.866	220-240/380-415//440-460	8;11;27
1000	L90S			.7512ET3WAXL90SF3-W2	872	XN	2073	1.00	1.91	79.1	13.189	220-240/380-415//440-460	8;11
1000	90S			E0.7512EP3WAX90SF3-W	660	XN	2073	1.00	1.92	76.4	11.969	220-240/380-415//440-460	8;11;27
1.5	1.1	3000	80	00136ET3WAX80F3-W22	711	XN	2073	1.00	2.32	83.4	10.866	220-240/380-415//440-460	8;11
		3000	80	E00136EP3WAX80F3-W22	538	XN	2073	1.00	2.33	80.2	10.866	220-240/380-415//440-460	8;11;27
		1500	90S	00118ET3WAX90SF3-W22	763	XN	2073	1.00	2.34	84.8	11.969	220-240/380-415//440-460	8;11
		1500	90S	E00118EP3WAX90SF3-W2	578	XN	2073	1.00	2.36	82.1	11.969	220-240/380-415//440-460	8;11;27
		1000	100L	00112ET3WAX100LF3-W2	924	XN	2073	1.00	2.68	81.5	14.803	220-240/380-415//440-460	8;11
		1000	90L	E00112EP3WAX90LF3-W2	700	XN	2073	1.00	2.80	78.1	12.953	220-240/380-415//440-460	8;11;27
2	1.5	3000	90S	00156ET3WAX90SF3-W22	811	XN	2073	1.00	3.06	85.2	11.969	220-240/380-415//440-460	8;11
		3000	90S	E00156EP3WAX90SF3-W2	614	XN	2073	1.00	3.08	82.5	11.969	220-240/380-415//440-460	8;11;27
		1500	90L	00158ET3WAX90LF3-W22	889	XN	2073	1.00	3.15	86.1	12.953	220-240/380-415//440-460	8;11
		1500	90L	E00158EP3WAX90LF3-W2	673	XN	2073	1.00	3.22	83.1	12.953	220-240/380-415//440-460	8;11;27
		1000	100L	00152ET3WAX100LF3-W2	1,152	XN	2073	1.00	3.71	82.8	14.803	220-240/380-415//440-460	8;11
		1000	100L	E00152EP3WAX100LF3-W	872	XN	2073	1.00	3.71	80.3	14.803	220-240/380-415//440-460	8;11;27
3	2.2	3000	90L	00236ET3WAX90LF3-W2	924	XN	2073	1.00	4.37	86.5	12.953	220-240/380-415//440-460	8;11
		3000	90L	E00236EP3WAX90LF3-W2	700	XN	2073	1.00	4.56	83.9	12.953	220-240/380-415//440-460	8;11;27
		1500	100L	00218ET3WAX100LF3-W2	1,116	XN	2073	1.00	4.50	87.2	14.803	220-240/380-415//440-460	8;11
		1500	100L	E00218EP3WAX100LF3-W	845	XN	2073	1.00	4.56	84.9	14.803	220-240/380-415//440-460	8;11;27
		1000//1200	112M	00212ET3YAX112MF3-W2	1,561	XN	96	1.00	5.16	84.7	15.472	380-415/660-690//440-460	8;11
		1000//1200	112M	E00212EP3YAX112MF3-W	1,181	XN	87	1.00	5.23	82.4	15.472	380-415/660-690//440-460	8;11;27

Continued on next page

**ADDITIONAL TECHNICAL DATA**  
 ELECTRICAL DATA: B-82  
 MECHANICAL DATA: Contact WEG



Refer to electrical and mechanical data sections for additional technical information. Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit <http://catalog.wegelectric.com>

Data subject to change without notice.

ATEX MOTORS

ATEX MOTORS

TEFC – Ex nA continued

TEFC – Ex nA continued

Table with 14 columns: HP, kW, RPM, NEMA Frame, Catalog Number, List Price, Mult. Symbol, Approx. Shipping Weight (lbs), Service Factor, FL Amps @ High, FL Eff (%), "C" Dimension (in), Voltage (V), Notes. Rows include motor specifications for HP ratings 4, 5.5, 7.5, 10, 15, and 20.

Continued on next page

Table with 14 columns: HP, kW, RPM, NEMA Frame, Catalog Number, List Price, Mult. Symbol, Approx. Shipping Weight (lbs), Service Factor, FL Amps @ High, FL Eff (%), "C" Dimension (in), Voltage (V), Notes. Rows include motor specifications for HP ratings 25, 30, 40, 50, 60, and 75.

Continued on next page

Refer to electrical and mechanical data sections for additional technical information. Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.

Refer to electrical and mechanical data sections for additional technical information. Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit http://catalog.wegelectric.com

Data subject to change without notice.

Can't find what you are looking for? Call 1-800-ASK-4WEG (275-4934)

ATEX MOTORS

ATEX MOTORS

TEFC – Ex nA *continued*

TEFC – Ex nA *continued*

HP	kW	RPM	NEMA Frame	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff (%)	"C" Dimension (in)	Voltage (V)	Notes
100	75	3000	280S/M	07536ET3YAX280SMF3-W	26,996	XN	1767	1.00	121	95.7	42.165	380-415/660-690//440-460	8;11
		3000	280S/M	E07536EP3YAX280SMF3W	20,430	XN	1553	1.00	126	94.3	42.165	380-415/660-690//440-460	8;11;27
		1500//1800	280S/M	07518ET3YAX280SMF3-W	27,072	XN	1771	1.00	127	95.7	42.165	380-415/660-690//440-460	8;11
		1500//1800	280S/M	E07518EP3YAX280SMF3W	20,544	XN	1573	1.00	130	94.4	42.165	380-415/660-690//440-460	8;11;27
		1000//1200	315S/M	07512ET3YAX315SMF3-W	30,515	XN	2285	1.00	133	95.9	50.157	380-415/660-690//440-460	8;11
		1000//1200	315S/M	E07512EP3YAX315SMF3W	23,092	XN	2010	1.00	137	94.2	50.157	380-415/660-690//440-460	8;11;27
125	90	3000	280S/M	09036ET3YAX280SMF3-W	28,691	XN	1844	1.00	145	95.9	42.165	380-415/660-690//440-460	8;11
		3000	280S/M	E09036EP3YAX280SMF3W	21,712	XN	1604	1.00	151	94.5	42.165	380-415/660-690//440-460	8;11;27
		1500//1800	280S/M	09018ET3YAX280SMF3-W	28,077	XN	1877	1.00	154	95.9	42.165	380-415/660-690//440-460	8;11
		1500//1800	280S/M	E09018EP3YAX280SMF3W	21,307	XN	1648	1.00	154	94.7	42.165	380-415/660-690//440-460	8;11;27
		1000//1200	315S/M	09012ET3YAX315SMF3-W	35,779	XN	2475	1.00	159	96.2	50.157	380-415/660-690//440-460	8;11
		1000//1200	315S/M	E09012EP3YAX315SMF3W	27,076	XN	2133	1.00	159	94.6	50.157	380-415/660-690//440-460	8;11;27
150	110	3000	315S/M	11036ET3YAX315SMF3-W	34,547	XN	2285	1.00	181	96.1	48.976	380-415/660-690//440-460	8;11
		3000	315S/M	E11036EP3YAX315SMF3W	26,144	XN	2091	1.00	183	94.9	48.976	380-415/660-690//440-460	8;11;27
		1500//1800	315S/M	11018ET3YAX315SMF3-W	35,670	XN	2391	1.00	187	96.3	50.157	380-415/660-690//440-460	8;11
		1500//1800	315S/M	E11018EP3YAX315SMF3W	27,068	XN	2120	1.00	192	95.0	50.157	380-415/660-690//440-460	8;11;27
		1000//1200	315S/M	11012ET3YAX315SMF3-W	45,413	XN	2603	1.00	194	96.3	50.157	380-415/660-690//440-460	8;11
		1000//1200	315S/M	E11012EP3YAX315SMF3W	34,367	XN	2294	1.00	194	94.9	50.157	380-415/660-690//440-460	8;11;27
175	132	3000	315S/M	13236ET3YAX315SMF3-W	39,500	XN	2475	1.00	212	96.4	48.976	380-415/660-690//440-460	8;11
		3000	315S/M	E13236EP3YAX315SMF3W	29,862	XN	2217	1.00	217	95.2	48.976	380-415/660-690//440-460	8;11
		1500//1800	315S/M	13218ET3YAX315SMF3-W	42,877	XN	2578	1.00	224	96.4	50.157	380-415/660-690//440-460	8;11
		1500//1800	315S/M	E13218EP3YAX315SMF3W	31,689	XN	2265	1.00	224	95.2	50.157	380-415/660-690//440-460	8;11
		1000//1200	315S/M	13212ET3YAX315SMF3-W	76,749	XN	2788	1.00	235	96.3	50.157	380-415/660-690//440-460	8;11
		1000//1200	315S/M	E13212EP3YAX315SMF3W	52,853	XN	2448	1.00	233	95.0	50.157	380-415/660-690//440-460	8;11
200	150	3000	315S/M	15036ET3YAX315S/MF3W	41,396	XN	2073	1.00	245	95.6	48.976	380-415/660-690//440-460	8;11
		3000	315S/M	E15036EP3YAX315SMF3W	31,360	XN	2073	1.00	253	94.8	48.976	220-240/380-415//440-460	8;11;27
		1500	315S/M	15018ET3YAX315S/MF3W	43,938	XN	2073	1.00	259	96.00	50.157	380-415/660-690//440-460	8;11
		1500	315S/M	E15018EP3YAX315SMF3W	33,286	XN	2073	1.00	254	95.4	50.157	220-240/380-415//440-460	8;11;27
		1000	315L	15012ET3YAX315LF3-W2	82,712	XN	2073	1.00	264	96.4	54.449	380-415/660-690//440-460	8;11
		1000	355M/L	E15012EP3YAX355MLF3W	62,660	XN	2073	1.00	291	95.0	58.346	220-240/380-415//440-460	8;11;27

Continued on next page

HP	kW	RPM	NEMA Frame	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL Eff (%)	"C" Dimension (in)	Voltage (V)	Notes		
220	160	3000	315S/M	16036EP3YAX315SMF3-W	38,870	XN	2358	1.00	262	95.3	48.976	380-415/660-690//440-460	8;11		
		3000	315S/M	16036ET3YAX315SMF3-W	51,363	XN	2653	1.00	253	96.7	48.976	380-415/660-690//440-460	8;11		
		1500//1800	315S/M	16018EP3YAX315SMF3-W	36,046	XN	2395	1.00	271	95.4	50.157	380-415/660-690//440-460	8;11		
		1500//1800	315S/M	16018ET3YAX315SMF3-W	47,534	XN	2704	1.00	268	96.6	50.157	380-415/660-690//440-460	8;11		
		1000//1200	315L	16012EP3YAX315LF3-W2	60,176	XN	2890	1.00	282	95.2	54.449	380-415/660-690//440-460	8;11		
		1000//1200	355M/L	16012EP3YAX355MLF3-W	65,792	XN	3488	1.00	290	96.0	58.346	380-415/660-690//440-460	8;11		
		1000//1200	315L	16012ET3YAX315LF3-W2	79,990	XN	3375	1.00	282	96.4	54.449	380-415/660-690//440-460	8;11		
		1000//1200	355M/L	16012ET3YAX355MLF3-W	86,940	XN	3799	1.00	294	95.7	58.346	380-415/660-690//440-460	8;11		
		270	200	3000	355M/L	20036EP3YAX355MLF3-W	66,531	XN	3563	1.00	320	95.6	55.591	380-415/660-690//440-460	8;11
				1500//1800	355M/L	20018EP3YAX355MLF3-W	64,081	XN	3380	1.00	346	95.6	58.346	380-415/660-690//440-460	8;11
1500//1800	315L			20018ET3YAX315LF3-W2	70,770	XN	3119	1.00	335	96.7	54.449	380-415/660-690//440-460	8;11		
1500//1800	355M/L			20018ET3YAX355MLF3-W	76,925	XN	3580	1.00	343	96.7	58.346	380-415/660-690//440-460	8;11		
1000//1200	315L			20012EP3YAX315LF3-W2	66,948	XN	3463	1.00	356	95.4	54.449	380-415/660-690//440-460	8;11		
1000//1200	355M/L			20012EP3YAX355MLF3-W	74,007	XN	3907	1.00	368	95.7	58.346	380-415/660-690//440-460	8;11		
1000//1200	355M/L			20012ET3YAX355MLF3-W	97,795	XN	4118	1.00	366	96.2	58.346	380-415/660-690//440-460	8;11		
340	250			3000	315L	25036EP3YAX315LF3-W2	73,948	XN	3084	1.00	400	95.6	53.268	380-415/660-690//440-460	8;11
				3000	355M/L	25036EP3YAX355MLF3-W	82,191	XN	3887	1.00	392	96.4	55.591	380-415/660-690//440-460	8;11
				1500//1800	315L	25018EP3YAX315LF3-W2	62,457	XN	3267	1.00	417	95.9	54.449	380-415/660-690//440-460	8;11
		1500//1800	355M/L	25018EP3YAX355MLF3-W	67,456	XN	3525	1.00	432	95.8	58.346	380-415/660-690//440-460	8;11		
		1500//1800	315L	25018ET3YAX315LF3-W2	76,550	XN	3549	1.00	422	96.9	54.449	380-415/660-690//440-460	8;11		
		1500//1800	355M/L	25018ET3YAX355MLF3-W	83,195	XN	3858	1.00	427	96.9	58.346	380-415/660-690//440-460	8;11		
		1000//1200	355M/L	25012EP3YAX355MLF3-W	88,256	XN	4229	1.00	461	95.5	58.346	380-415/660-690//440-460	8;11		
		1000//1200	355M/L	25012ET3YAX355MLF3-W	111,338	XN	4628	1.00	457	96.3	58.346	380-415/660-690//440-460	8;11		

Refer to electrical and mechanical data sections for additional technical information. Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit <http://catalog.wegelectric.com>

Data subject to change without notice.

Refer to electrical and mechanical data sections for additional technical information. Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit <http://catalog.wegelectric.com>

Data subject to change without notice.

Can't find what you are looking for? Call 1-800-ASK-4WEG (275-4934)

# IEC Tru-Metric™ Motors

## ATEX MOTORS – Explosion Proof

### TEFC - Ex d

- 50 Hz and 60 Hz rated (1.00 service factor)
- Class F insulation (Impregnation Resin and magnet Wire are class H)
- F3 mounted as standard
- Stainless Steel Nameplate - Laser etched with high contrast background
- Regreasable ball bearings (Frames 225 and up)
- Gasketed conduit box
- Zone 1 and 2, Groups IIA and IIB, class of temperature T4
- Suitable for WYE/Delta Start
- Design N
- Conductive plastic fan (frames 63 up to 315)
- Aluminum fan (frame 355)
- Lip Seal on both endshields
- Thermistors 1 per phase



HP	kW	RPM	NEMA Frame	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL. Eff (%)	"C" Dimension (in)	Voltage (V)	Notes
1	0.75	3000	90S	E.7536XP3WAX90SF3	1,267	XD	67.3	1.00	1.58	80.0	12.441	220-240/380-415//440-460	8;11;27
		1500//1800	90S	E.7518XP3WAX90SF3	1,283	XD	77	1.00	1.72	80.0	12.441	220-240/380-415//440-460	8;11;27
		1000//1200	90L	E.7512XP3WAX90LF3	1,199	XD	74.3	1.00	1.92	76.5	13.425	220-240/380-415//440-460	8;11;27
1.5	1.1	3000	90S	E00136XP3WAX90SF3	1,318	XD	67.3	1.00	2.25	81.5	12.441	220-240/380-415//440-460	8;11;27
		1500//1800	90L	E00118XP3WAX90LF3	1,334	XD	74.3	1.00	2.37	82.5	13.425	220-240/380-415//440-460	8;11;27
		1000//1200	90L	E00112XP3WAX90LF3	1,588	XD	74.3	1.00	3.06	78.1	13.425	220-240/380-415//440-460	8;11;27
2	1.5	3000	90S	E00156XP3WAX90SF3	1,371	XD	59.5	1.00	3.06	84.2	12.441	220-240/380-415//440-460	8;11;27
		1500//1800	100L	E00158XP3WAX100LF3	1,488	XD	101	1.00	3.15	83.5	15.118	220-240/380-415//440-460	8;11;27
		1000//1200	100L	E00152XP3WAX100LF3	1,757	XD	101	1.00	3.77	80.5	15.118	220-240/380-415//440-460	8;11;27
3	2.2	3000	90L	E00236XP3WAX90LF3	1,534	XD	50.7	1.00	4.49	84.2	13.425	220-240/380-415//440-460	8;11;27
		1500//1800	100L	E00218XP3WAX100LF3	1,783	XD	111	1.00	4.60	85.0	15.118	220-240/380-415//440-460	8;11;27
		1000//1200	112M	E00212XP3YAX112MF3	2,040	XD	126	1.00	5.20	81.8	15.512	380-415/660-690//440-460	8;11;27
4	3	3000	100L	E00336XP3WAX100LF3	1,918	XD	92.6	1.00	5.51	87.1	15.118	220-240/380-415//440-460	8;11;27
		1500//1800	112M	E00318XP3YAX112MF3	2,137	XD	137	1.00	6.12	86.0	15.512	380-415/660-690//440-460	8;11;27
		1000//1200	132S	E00312XP3YAX132SF3	3,224	XD	180	1.00	6.70	85.0	17.756	380-415/660-690//440-460	8;11;27
5.5	4	3000	112M	E00436XP3YAX112MF3	2,414	XD	132	1.00	7.31	87.5	15.512	380-415/660-690//440-460	8;11;27
		1500//1800	112M	E00418XP3YAX112MF3	2,468	XD	147	1.00	8.22	87.2	15.512	380-415/660-690//440-460	8;11;27
		1000//1200	132M	E00412XP3YAX132MF3	3,607	XD	202	1.00	8.62	85.5	19.252	380-415/660-690//440-460	8;11;27
7.5	5.5	3000	132S	E00536XP3YAX132SF3	3,083	XD	188	1.00	10.1	88.0	17.756	380-415/660-690//440-460	8;11;27
		1500//1800	132S	E00518XP3YAX132SF3	3,025	XD	184	1.00	10.6	89.2	17.756	380-415/660-690//440-460	8;11;27
		1000//1200	132M	E00512XP3YAX132MF3	3,800	XD	219	1.00	12.1	86.1	19.252	380-415/660-690//440-460	8;11;27
10	7.5	3000	132S	E00736XP3YAX132SF3	3,556	XD	179	1.00	14.2	88.8	17.756	380-415/660-690//440-460	8;11;27
		1500//1800	132M	E00718XP3YAX132MF3	3,685	XD	224	1.00	13.8	89.5	19.252	380-415/660-690//440-460	8;11;27
		1000//1200	160M	E00712XP3YAX160MF3	5,017	XD	333	1.00	14.7	88.8	23.543	380-415/660-690//440-460	8;11;27
15	11	3000	160M	E01136XP3YAX160MF3	4,148	XD	334	1.00	20.0	90.8	23.543	380-415/660-690//440-460	8;11;27
		1500//1800	160M	E01118XP3YAX160MF3	4,151	XD	342	1.00	20.7	90.6	23.543	380-415/660-690//440-460	8;11;27
		1000//1200	160L	E01112XP3YAX160LF3	5,281	XD	375	1.00	22.3	89.6	25.669	380-415/660-690//440-460	8;11;27
20	15	3000	160M	E01536XP3YAX160MF3	4,924	XD	334	1.00	26.4	91.0	23.543	380-415/660-690//440-460	8;11;27
		1500//1800	160L	E01518XP3YAX160LF3	4,608	XD	364	1.00	28.1	91.2	25.669	380-415/660-690//440-460	8;11;27
		1000//1200	180L	E01512XP3YAX180LF3	6,436	XD	512	1.00	26.8	89.8	27.638	380-415/660-690//440-460	8;11;27
25	18.5	3000	160L	E01836XP3YAX160LF3	5,915	XD	392	1.00	32.8	91.3	25.669	380-415/660-690//440-460	8;11;27
		1500//1800	180M	E01818XP3YAX180MF3	6,059	XD	490	1.00	34.5	92.4	26.142	380-415/660-690//440-460	8;11;27
		1000//1200	200L	E01812XP3YAX200LF3	8,379	XD	617	1.00	34.6	91.5	30.197	380-415/660-690//440-460	8;11;27
30	22	3000	180M	E02236XP3YAX180MF3	7,099	XD	480	1.00	38.3	92.0	26.142	380-415/660-690//440-460	8;11;27
		1500//1800	180L	E02218XP3YAX180LF3	6,706	XD	478	1.00	41.1	92.5	27.638	380-415/660-690//440-460	8;11;27
		1000//1200	200L	E02212XP3YAX200LF3	9,487	XD	529	1.00	41.2	92.0	30.197	380-415/660-690//440-460	8;11;27

Continued on next page







ATEX MOTORS

TEFC – Ex d – IE2 *continued*

HP	KW	RPM	NEMA Frame	Catalog Number	List Price	Mult. Symbol	Approx. Shipping Weight (lbs)	Service Factor	FL Amps @ High	FL. Eff (%)	"C" Dimension (in)	Voltage (V)	Notes
40	30	3000	200L	E03036XP3YAX200LF3	8,824	XD	647	1.00	51.6	93.0	30.197	380-415/660-690//440-460	8;11;27
		1500//1800	200L	E03018XP3YAX200LF3	8,717	XD	684	1.00	54.9	93.2	30.197	380-415/660-690//440-460	8;11;27
		1000//1200	225S/M	E03012XP3YAX225SMF3	12,936	XD	937	1.00	53.1	92.6	33.425	380-415/660-690//440-460	8;11;27
50	37	3000	200L	E003736XP3YAX200LF3	10,812	XD	573	1.00	63.3	94.6	30.197	380-415/660-690//440-460	8;11;27
		1500//1800	225S/M	E03718XP3YAX225SMF3	11,099	XD	1018	1.00	63.7	93.6	33.425	380-415/660-690//440-460	8;11;27
		1000//1200	250S/M	E03712XP3YAX250SMF3	15,176	XD	1103	1.00	67.4	93.1	36.339	380-415/660-690//440-460	8;11;27
60	45	3000	225S/M	E04536XP3YAX225SMF3	17,255	XD	1017	1.00	75.1	93.7	33.425	380-415/660-690//440-460	8;11;27
		1500//1800	225S/M	E04518XP3YAX225SMF3	12,846	XD	970	1.00	76.1	93.8	33.425	380-415/660-690//440-460	8;11;27
		1000//1200	280S/M	E04512XP3YAX280SMF3	21,544	XD	1625	1.00	83.2	93.5	40.787	380-415/660-690//440-460	8;11;27
75	55	3000	250S/M	E05536XP3YAX250SMF3	21,608	XD	1131	1.00	91.5	94.0	36.339	380-415/660-690//440-460	8;11;27
		1500//1800	250S/M	E05518XP3YAX250SMF3	19,034	XD	1226	1.00	91.8	94.0	36.339	380-415/660-690//440-460	8;11;27
		1000//1200	280S/M	E05512XP3YAX280SMF3	27,320	XD	1704	1.00	100	93.7	40.787	380-415/660-690//440-460	8;11;27
100	75	3000	280S/M	E07536XP3YAX280SMF3	30,248	XD	1854	1.00	124	94.5	40.787	380-415/660-690//440-460	8;11;27
		1500//1800	280S/M	E07518XP3YAX280SMF3	23,986	XD	1852	1.00	126	94.8	40.787	380-415/660-690//440-460	8;11;27
		1000//1200	315S/M	E07512XP3YAX315SMF3	31,133	XD	1599	1.00	133	94.1	45.512	380-415/660-690//440-460	8;11;27
125	90	3000	280S/M	E09036XP3YAX280SMF3	36,063	XD	1934	1.00	149	94.8	40.787	380-415/660-690//440-460	8;11;27
		1500//1800	280S/M	E09018XP3YAX280SMF3	33,209	XD	2060	1.00	151	94.8	40.787	380-415/660-690//440-460	8;11;27
		1000//1200	315S/M	E09012XP3YAX315SMF3	40,124	XD	2271	1.00	161	94.4	45.512	380-415/660-690//440-460	8;11;27
150	110	3000	315S/M	E11036XP3YAX315SMF3	42,763	XD	2205	1.00	182	95.0	45.512	380-415/660-690//440-460	8;11;27
		1500//1800	315S/M	E11018XP3YAX315SMF3	37,846	XD	2426	1.00	184	95.2	45.512	380-415/660-690//440-460	8;11;27
		1000//1200	315S/M	E11012XP3YAX315SMF3	48,658	XD	2569	1.00	194	94.6	45.512	380-415/660-690//440-460	8;11;27
175	132	3000	315S/M	E13236XP3YAX315SMF3	54,064	XD	2337	1.00	215	95.3	45.512	380-415/660-690//440-460	8;11;27
		1500//1800	315S/M	E13218XP3YAX315SMF3	45,939	XD	2624	1.00	221	95.3	45.512	380-415/660-690//440-460	8;11;27
		1000//1200	355M/L	E13212XP3YAX355MLF3	82,346	XD	3749	1.00	240	95.2	57.835	380-415/660-690//440-460	8;11;27
220	160	3000	315S/M	16036XP3YAX315SMF3	67,306	XD	2567	1.00	260	95.4	45.512	380-415/660-690//440-460	8;11
		1500//1800	315S/M	16018XP3YAX315SMF3	50,129	XD	2668	1.00	270	95.4	45.512	380-415/660-690//440-460	8;11
		1000//1200	355M/L	16012XP3YAX355MLF3	90,159	XD	3969	1.00	290	95.4	57.835	380-415/660-690//440-460	8;11
270	200	3000	355M/L	20036XP3YAX355MLF3	100,962	XD	4035	1.00	320	95.1	57.835	380-415/660-690//440-460	8;11
		1500//1800	355M/L	20018XP3YAX355MLF3	80,905	XD	4006	1.00	333	96.0	57.835	380-415/660-690//440-460	8;11
		1000//1200	355M/L	20012XP3YAX355MLF3	110,130	XD	4212	1.00	368	95.4	57.835	380-415/660-690//440-460	8;11
340	250	3000	355M/L	25036XP3YAX355MLF3	111,375	XD	4348	1.00	392	95.7	57.835	380-415/660-690//440-460	8;11
		1500//1800	355M/L	25018XP3YAX355MLF3	94,903	XD	4236	1.00	415	95.8	57.835	380-415/660-690//440-460	8;11
		1000//1200	355M/L	25012XP3YAX355MLF3	133,308	XD	4818	1.00	452	95.6	57.835	380-415/660-690//440-460	8;11
430	315	1500//1800	355M/L	31518XP3YAX355MLF3	108,540	XD	4844	1.00	516	95.9	57.835	380-415/660-690//440-460	8;11;27

Refer to electrical and mechanical data sections for additional technical information. Please refer to back cover for description of "NOTES"

For detailed specifications, data sheets, drawings and performance curves visit <http://catalog.wegelectric.com>